

Stucco Wall System

Wall System

StuccoLite Series



THE LOOK AND FEEL OF STUCCO AT HALF THE PRICE.

StuccoLite's proven technology has been utilized on virtually every type of pre-engineered building to date including residential homes and apartments.

StuccoLite stucco wall panels are ideally suited for all types of commercial construction projects. The panels are manufactured to fit the size of a particular building, virtually eliminating waste and time needed to field cut panels.

With 24 standard colors available and backed by an industry leading 25 year warranty, StuccoLite will enhance the beauty of any project. Adding an additional layer of insulation before our panels installation has resulted in significant savings in heating and cooling costs.

Panels can be installed in any climate and throughout the year. All components are manufactured using the latest roll-forming and paint application technology.

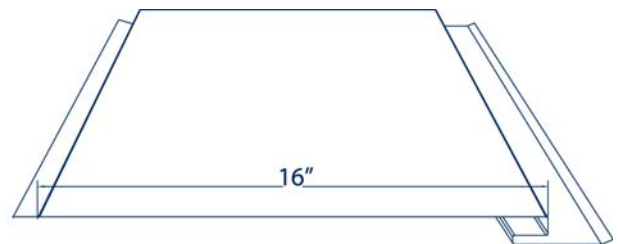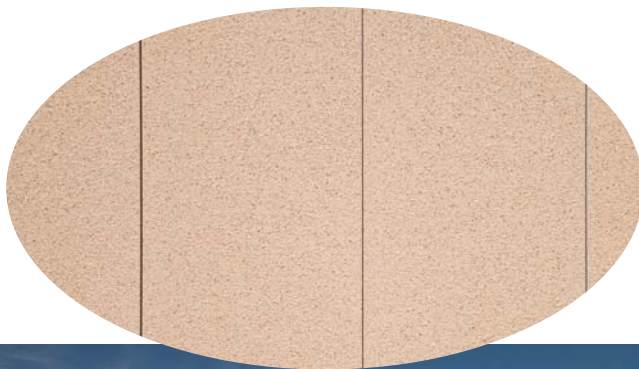

INNOVATION • NEW TECHNOLOGY • BETTER PRODUCTS • GLOBAL REACH

www.RigidBuilding.com

StuccoLite Series Stucco Wall System

PRODUCT DESCRIPTION

StuccoLite wall panels are roll formed from 20 gauge hot dipped galvanized steel coil. All wall fasteners are concealed to achieve a smooth consistent surface.

Basic use – StuccoLite wall panels are used primarily as a wall cladding system on new construction and renovation projects, up to six stories.

Limitations – Because StuccoLite wall panels are pre-finished, care should be exercised during erection to avoid damage. Avoid dragging panels over surfaces that may cause scuffing or marring. StuccoLite wall systems are not designed to be used as load bearing walls.

Composition & Materials – StuccoLite wall panels consist of hot dipped galvanized steel of commercial weight G-60 A924 steel, coated two sides utilizing an epoxy primer with dry film thickness of 1 to 1.5 mills.

Sizes – Wall panels are available in 16” wide profiles and in lengths up to 24’. Trim and flashing profiles are 12 feet in length and manufactured from 24 gauge steel.

Colors – StuccoLite is available in 24 standard colors – up to 1,500 colors are available for selection on a custom basis.

Finish – Proprietary formula utilizing four sizes of marble crushed to obtain a beautiful stucco coated steel panel. Colorfast and long lasting.

INSTALLATION

Install in accordance with information provided by StuccoLite can be cut and riveted on the job site, utilizing conventional hand and power tools. StuccoLite wall systems are easily applied over substrates having variegated surfaces. This ability makes StuccoLite a perfect choice for renovation projects as well as new construction.

AVAILABILITY

For more information about StuccoLite please contact your District Manager or local Authorized Builder.

CORPORATE HEADQUARTERS

18933 Aldine Westfield - Houston, TX 77073
Phone: 888.467.4443 - Fax: 281.443.9064

RBS140 Rev. 9/2013

WARRANTY

StuccoLite wall systems are warranted to be free from defects in material and workmanship, for a period of 25 years from the time of installation. See full warranty for details.

MAINTENANCE

StuccoLite wall panels do not require maintenance. If cleaning is desired, the use of a pressure sprayer is suggested. If a change in panel color is needed, this can be done easily by using a high quality acrylic paint applied to the stucco surface.

TECHNICAL DATA

Coating – Epoxy primer with dry film thickness of 1 to 1.5 mills. ASTM B117-73, ASTM D2794

Adhesion – Test ASTM D2794

Formidability – 2 T Bend ASTM D1737

Color Retention – Does not show a color change at 2000 hours STM G26

Water Penetration – Test ASTM E331-86

Structural – Test ASTM E330-84 and ASTM E1592-95

Freeze Thaw – Test ASTM C666-84

Racking Shear – Test ASTM E72-80

Air Infiltration – Test ASTM E283-91

Water Soak – Test ASTM D870

Salt Spray – Test ASTM B-117

Flammability – Test ASTM E-84

Weathering – Test G23



www.RigidBuilding.com